

|| Shree Shankeshwarayanamah ||



# DIVYA JYOT PIPE STORES



**SPARK**<sup>®</sup>  
HOSE

**APEX**<sup>®</sup>  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# **DIVYA JYOT PIPE STORES**

*“Divya Jyot Pipe Stores” is a prominent and well-established supplier of an industrial hoses in Mumbai, Maharashtra, Pan India. With over more than two decades of experience since 2001, the company has been actively engaged in importing technical industrial hoses from Germany and China. Furthermore, the company is also a leading exporter and involved in contract manufacturing of various products under the "SPRAK & APEX" brand and catering to the needs of industries like Material Handling, Ceramic, Surface Cleaning, Road Sweeping, Foundries & Furnaces, Tea Coffee estates, Cashew Nut Processing, Plastic Processing, Printing & Packaging, Offset Printing, Textile, Wood Working, Floor Care, Food & Beverage, Chemical, HVAC, Agricultural Products Handling & Processing, Gas Cutting & Welding, Jack Hammer Drilling, Car Washing, Industrial Compressors, Laser & Plasma Cutting, Automation, Automotive, Gas Exhaust, Cable Protection, Swimming Pool, CNC Machine, Pharma, Air & Water, Construction and Mining, Hot Water & Steam, and also specialized hoses like Abrasion Resistant, Flame Retardant, Antistatic, Permanently Antistatic, Conductive, Heat Resistant etc. We stand out from others in product application knowledge of various hoses and hose selection in general.*

# INDEX

PRODUCT NAME	PAGE NO.
SPARK THUNDER SPRING HOSE (FOOD - GRADE)	1
APEX PVC THUNDER HOSE (FOOD GRADE)	2
SPARK ANTI-STATIC THUNDER HOSE (COPPER WIRE)	3
SPARK PVC BRAIDED HOSE	4
SPARK PVC FABRIC HOSE	5
SPARK FLEXIBLE YELLOW DUCT HOSE	6
SPARK POLY PROPYLENE HOSE	7
SPARK ALUMINIUM FLEXIBLE DUCT HOSE	8
SPARK ALUMINIUM SEMI FLEXIBLE DUCT HOSE	9
SPARK PVC FLEXIBLE HOSE	10
SPARK EVA HOSE / SWIMMING POOL HOSE	11
SPARK POLYURETHANE COPPER COATED STEEL WIRE REINFORCED HOSE	12
SPARK SILICON DOUBLE LAYER HOSE WITH STEEL WIRE REINFORCED	13
TPR THERMOPLASTIC RUBBER HOSE	14
SPARK POLYURETHANE (P.U.) TUBING	15
SILICON NYLON BRAIDED (FOOD - GRADED) HOSE	16
SILICON FOOD - PHARMACEUTICAL TUBING	17-18
AAGAM PVC GOLDEN / TRANSPARENT TUBING	19
GOODLON PT / WELDING / WATER HOSE	20
SPARK RUBBER HYDROLIC HOSE SAE 100 R-1 AT	21
SPARK RUBBER HYDROLIC HOSE SAE 100 R-2 AT	22
REALON PVC FLEXIBLE DUCT PIPE (GREY / TRANSPARENT)	23
REALON AIR / WELDING / ROCK DRILL HOSE	24
REALON SUPER SPRAY / POWER SPRAY / CONSTRUCTION HOSE	25
APEX CANVAS / BLUE LAY FLAT HOSE	26
ANCHOR MEDIUM DUTY SUCTION HOSE (GREEN)	27
ANCHOR HEAVY DUTY SUCTION HOSE (GREY)	28
P.V.C STEEL WIRE VINYL HOSE	29
TUFHOSE INDUSTRIAL WHITE / GREEN BRAIDED / GAS WELDING HOSE	30
TUFHOSE FIRE / SUPER / POWER SPRAY HOSE	31
GOODLON SPIDER / WEATHER PROOF HOSE	32
JOLLY MS/SS WORM DRIVE HOSE CLAMPS	33
PTFE TUBING	34
POLYAMIDE NYLON TUBING	35
OTHER INDUSTRIAL PRODUCT	36



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE THUNDER SPRING HOSE (FOOD - GRADE)



FDA 21 CFR 175.300

### MATERIAL & CONSTRUCTION:

- Made with Flexible Transparent PVC with Spirally Reinforced Immovable Spring Steel wire Inner and Outer Hose wall is Smooth

### TEMP RANGE:

- 20°C to + 70°C Approx

### APPLICATIONS:

- Delivery and Suction hose for Solid Gaseous Liquid Media, Oily Foods and Industrial Mechanical oil Acid
- Use with Vacuum Pumps, Agricultural Machinery Construction Industry Sewer Cleaning
- Food and Drug Administration(FDA) FDA 21 CFR 175.300

I.D (MM)	O.D (MM)	THICKNESS (MM)	Working Pressure	Bursting Pressure	Vacuum MH <sub>2</sub> O	Standard Length (M)	Price per/mtr
8	14	2.5	8	24	10	100	90/-
10	16	3	8	24	10	100	100/-
12.5	18	3	8	24	9.5	100	110/-
16	22	3	6	18	9.5	50	140/-
19	26	3.5	6	18	9.5	50	150/-
25	32	3.5	6	18	8.5	50	200/-
32	40	4	5	16	8.5	50	275/-
38	47	4.5	5	16	8.5	50	365/-
40	50	4.5	5	16	8.5	50	395/-
45	55	5	5	16	8	50	540/-
51	61	5.5	5	16	8	30	540/-
60	70	5.5	4	12	8	30	905/-
63	78	7	4	12	8	30	905/-
75	90	7.5	4	12	7	20	1250/-
90	105	7.5	4	12	7	20	1625/-
102	118	8	3	9	7	20	1625/-
125	141	8	3	9	5	15	2700/-
152	168	8	3	9	4	15	3100/-
202	224	10	3	9	4	10	6900/-

★ DISCOUNT: \_\_\_% ★

**APEX**  
HOSE

**ANCHOR<sup>®</sup>**

**TUFHOSE**

**Realon<sup>®</sup>**

**Agam<sup>®</sup>**  
HOSES

**GOODLON<sup>®</sup>**



# DIVYA JYOT PIPE STORES

## APEX HOSE PVC THUNDER HOSE (FOOD - GRADE)



### CONSTRUCTION:

- Apex Thunder Hose Made From Flexible Transparent PVC with Spirally Reinforced Immovable Spring Steel Wire. Inner and Outer Hose Wall is Smooth

### TEMP RANGE:

- -20°C to + 70°C Approx

### APPLICATIONS:

- Delivery and Suction Hose For Solid Gaseous and Liquid Media
- Used For Transport of Food Stuffs
- Very Flexible & Does Not Kink When Bent From a Small Radius
- Provide Outstanding Visual Flow Characteristics
- Used For Vacuum Pumps, Agricultural Machinery, Construction Industry, Sewer Cleaning and Ground Water Drainage

### FEATURES:

- Pressure and Vacuum Resistant (Highly Flexible)
- Made From Food Grade Hose

I.D (MM)	O.D (MM)	Working Pressure	Bursting Pressure	STD Length	Rate / Meter
12.5	17	5	15	100	60/-
16	21	5	15	50	85/-
19	23	5	15	50	100/-
25	30	5	15	50	140/-
32	38	4	12	50	200/-
38	45	4	12	50	260/-
50	56	4	12	30	360/-
63	72	3	9	30	600/-
75	85	3	9	20	780/-
102	114	3	9	15	1300/-

★ DISCOUNT: \_\_\_\_\_% ★

**SPARK**<sup>®</sup>  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES

**SPARK**<sup>®</sup>  
**HOSE**

## ANTI -STATIC THUNDER SPRING HOSE (COPPER WIRE)



**CONSTRUCTION:**

Made from food grade non-toxic ingredients also comply with the food and drug administration (FDA) activity

**TEMPERATURE RANGE** - 40° C -70° C approx

**Application:** spark thunder hose is mainly applied on the places to generate static such as buildings, factories, mine and oil. Also for section of Gas, liquid powder and dust.. copper wire is being inserted to avoid electric shock and impact on the workers. And this can also avoid blockage of the internal flow because of the static electricity .With strong resistance to Oil, The spark anti static hose can be used worry free for oily food and industrial mechanical Oil. can also be used for suction or pressure feed situation. The spark anti static hose has strong form retention to resist breaking and collapsing.

SIZE CD INSIDE DIA (MM)	WORKING PRESSURE (BAR)@27°C	BURSTING PRESSURE (BAR)@27°C	VACCUM MH <sub>2</sub> O	STANDARD LENGTH	RATE PER MTR (NR)
38 X 47	5	16	8.50	30	440/-
50 X 61	5	16	8.00	30	660/-
63 X 77	4	14	7.00	30	1050/-
75 X 89	4	14	7.00	30	1275/-
100 X 116	4	14	7.00	30	1825/-

★ DISCOUNT: \_\_\_\_\_% ★





# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> PVC BRAIDED HOSE (NON TOXIC & FOOD - GRADE) HOSE



### TUBE:

- Strong Very Flexible & Smooth Non Toxic Transparent FDA Food Grade Plasticized PVC Inner.
- Exterior Spiral Cover PVC Strip

### REINFORCEMENT:

- High Density PVC Coated Polyester Fibre.
- PVC with Nylon Twisted Thread

### TEMP RANGE:

- 0°C to 65°C

### FEATURES:

- Durable
- Anti-Cold Proof
- Non-Inflated
- High Flexibility
- No Fissure Phenomenon by Ultraviolet Rays & Direct to Rays of the Sun.
- Light Weight
- Easy to Handle
- Good Transparency

### APPLICATION:

- Water Supply & Draining for Equipment.
- Delivery of Food Liquids, Beverages, Fruit Juices, Milk, Wine, & Liquor.
- Suitable for Drinking Water.
- For Vending Machines, Food Packing Machines, Ice Machine & Refrigerators.

SIZE I.D x O.D	SIZE (INCH)	WORKING PRESSURE (KG/CM)	BURSTING PRESSURE (KG/CM)	STANDARD LENGTH (MTRS)	RATE PER MTR (INR)
-------------------	----------------	--------------------------------	---------------------------------	------------------------------	--------------------------

### FOOD - GRADE

6.3 x 12.3	1/4	10	30	100	42/-
8 x 14	5/16	10	30	100	52/-
9.5 x 15.5	3/8	10	30	100	62/-
12 x 19.5	1/2	8	24	100	83/-
15 x 22.5	5/8	8	24	100	114/-
19 x 28	3/4	8	24	30 / 50	140/-
24.5 x 33	1	7	21	50	182/-
31.5 x 40.5	1-1/4	6	18	30	260/-
38 x 48	1-1/2	6	18	30	378/-
50 x 61	2	5	15	30	520/-
63 x 77	2 1/2	5	15	30	845/-
75 x 91	3	5	15	30	1170/-

### NON TOXIC

4 x 8	5/32	10	30	100	22/-
5 x 8	13/64	10	30	100	22/-
6 x 10	1/4	10	30	100	32/-
8 x 12	5/16	10	30	100	39/-
10 x 14	13/32	10	30	100	46/-

★ DISCOUNT: \_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE PVC FABRIC HOSE



SIZE ID (INCH)	SIZE ID (MM)	PRICE PER MTR
1 1/2	38	245/-
1 3/4	45	250/-
2	51	260/-
2 1/2	63	280/-
3	76	345/-
3 1/4	80	345/-
3 1/2	90	380/-
4	102	400/-
4 1/2	110	480/-
	115	490/-
5	127	495/-
5 1/2	140	585/-
6	152	610/-
6 1/2	160	660/-
7	175	770/-
8	203	850/-
9	225	970/-
10	254	1080/-
11	275	1180/-
12	305	1270/-
14	356	1575/-
16	406	1925/-
18	457	2190/-
20	508	2510/-

**TUBE:**

- Fabric Reinforced Hose

**REINFORCEMENT:**

- Spring Steel Wire Integrated in Wall

**COVER:**

- PVC Coated Polyester Fabric

**TEMP RANGE:**

- -10°C Approx to + 80°C Approx
- Short Time +100°C Approx

**APPLICATIONS:**

- For Welding Extraction, Blowers & Portable Evacuators.
- For Air Conditioning & Ventilation Technology.
- Dryer Machines For Both Positive & Negative Pressure.
- Removal Of Air, Gas, Fumes & Dust.

**PROPERTIES:**

- Good Resistance to Alkalies & Acids, Chemicals, UV & Ozone.
- Highly Flexible & Compressible 6:1.
- Capable of Electro-Static Discharge by Grounding the Spiral.
- Light Weight & Designed to give Maximum Air Flow

**STANDARD COLOUR:**

- Black & Grey

**STANDARD LENGTH**

- 10 MTR

★ DISCOUNT: \_\_\_% ★







# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE FLEXIBLE YELLOW DUCT HOSE



### TUBE:

- Spiral: Reinforced Steel Wire Covered in PVC Strip

### MATERIAL:

- Wall: High Density PVC Coated Polyester Fabric
- Spiral: Reinforced Steel Wire
- Exterior Spiral Cover: PVC Strip

### TEMP RANGE:

- -20°C to +80°C Approx

### APPLICATIONS:

- As Ventilation Duct Ideal For Air Conditioning & Ventilation Of Fumes, Light Duty Dust Extraction & Movement Of Air.
- Widely Used In Working environment such as Airport, Tunnel, Basement, Waste Gas Exhaust Out.
- As a Flexible Connection Between Grilles Diffusers, Fans & Other Air Movement Units.

### FEATURES:

- Anti Static
- Oil, Acid & Alkali Resistant
- Highly Flexible
- Very Small Bending Radius
- Flame Retardant
- Kink Proof & Water Proof
- Compressable & Easy to Carry

SIZE I.D (MM)	SIZE ID (INCH)	LENGTH (MTRS)	RATE PER MTR (INR)
150	6	10	550/-
200	8	10	575/-
250	10	10	615/-
300	12	10	700/-
350	14	10	850/-
400	16	10	900/-
450	18	10	1100/-
500	20	10	1215/-
600	24	10	1350/-

★ DISCOUNT: \_\_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> POLY PROPYLENE HOSE HOSE



### CONSTRUCTION:

- Spring Steel Wire Integrated in Wall
- Heavily Corrugated & Capable of Axial Compression into fixed position.

### TEMP RANGE:

- -20°C to + 80°C Approx

### FEATURES:

- Super Light Model
- Good Resistance to Alkalis & Acids.
- Good Resistance to Chemicals & Fumes
- Good Resistance to UV & Ozone.
- Self Supporting

### APPLICATIONS:

- Conveyance of Air / Dust.
- Low temperature Welding & Soldering Fume Extraction.
- For Portable Air Conditioning & Ventilation Technology.
- Printing / Lamination Machines.
- Auto Coner OHTC Suction (Textile Machinery).

### STANDARD COLOR:

- Ivory & White

SIZE (ID) (MM)	SIZE (OD) (MM)	WORKING PRESSURE (BAR)	BENDING RADIUS	VACUUM PRESSURE	STANDARD LENGTH (MTR.)	RATE PER MTR. (INR)
25	32	0.70	35	0.25	5	300/-
32	38	0.65	42	0.22	5	300/-
38	46	0.58	50	0.19	5	300/-
50	58	0.43	65	0.16	5	300/-
63	73	0.35	80	0.12	5	310/-
76	85	0.30	93	0.10	5	350/-
90	100	0.25	110	0.07	5	360/-
100	110	0.23	120	0.06	5	360/-
125	135	0.18	148	0.04	5	490/-
150	160	0.16	176	0.04	5	710/-
200	210	0.12	230	0.03	5	1050/-
250	260	0.09	286	0.01	5	1650/-

★ DISCOUNT: \_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES

**SPARK<sup>®</sup>**  
**HOSE**

## ALUMINIUM FLEXIBLE DUCT HOSE



**ALUMINIUM  
FOIL HOSE**



**ALUMINIUM  
WITH FABRIC HOSE**

**TEMP RANGE:**

- -30°C to + 140°C Approx

**FEATURES**

- Highly Flexible & Compressible
- PVC Layer Provides additional Protection from Punctures, Tear Condensation Build up.
- Small Bending Radius
- No Toxic gases release at high temperature on fire.
- Light Weight, Heat Resistant, Flame resistant, Low Noise.
- Aluminum foil can be subdivided into two layer so on.

**STANDARD COLOUR:**

- Silver / Black with Silver Foil

**APPLICATIONS:**

- For Ventilation technology, Clean Room, Electrical Plants.
- Electrical Component Manufacturer
- PCB Manufactures
- Exhaust Air Ventilation, Air Conditioning & HVAC System.
- Used in Various types of Ventilation Systems

SIZE (MM)	SIZE (INCH)	EXTENDED STANDARD LENGTH (MTR)	ALUMINIUM FOIL HOSE RATE PER PCS. (INR)	ALUMINIUM WITH FABRIC HOSE RATE PER PCS. (INR)
50	2	10	1150/-	1450/-
63	2-1/2	10	1150/-	1650/-
80	3	10	1150/-	1950/-
100	4	10	1250/-	1950/-
125	5	10	1450/-	2450/-
150	6	10	1650/-	2650/-
200	8	10	2150/-	3250/-
250	10	10	2450/-	3450/-
300	12	10	2550/-	3550/-
350	14	10	2950/-	3950/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

**SPARK**<sup>®</sup>  
**HOSE**

## ALUMINIUM SEMI FLEXIBLE DUCT HOSE



**CONSTRUCTION:**

- Special "A" grade Aluminum

**TEMP RANGE:**

- -30°C to + 200°C Approx

**FEATURES**

- Stretch Ratio up to 1:3.
- High Temperature Resistance.
- High Flexibility and Stretchability in Low & Medium Air Pressure.
- Long Service Life
- Quick & Easy Installation
- Leak Proof, Break Proof
- Will not Delaminate / Dry Rot (when Pulled Open, Bent, Re-bent, Recompressed Heat Aged or Cycled with Moist or Dried Air.)

**APPLICATIONS:**

- Used in Kitchen Ventilation
- Water Heater
- Exhaust Fan
- Central Air Conditioning
- Chimney lines

SIZE (MM)	SIZE (INCH)	EXTENDED STANDARD LENGTH (MTRS.)	RATE PER METER (INR)
50	2	3	950/-
63	2-1/2	3	950/-
76	3	3	950/-
100	4	3	950/-
125	5	3	1350/-
150	6	3	1350/-
200	8	3	1950/-
250	10	3	4000/-
300	12	3	5500/-
350	14	3	4150/-
400	16	3	4850/-
450	18	3	5200/-
500	20	3	5900/-

★ DISCOUNT: \_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>

Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street), Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795 | Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

✉ pipestores@gmail.com / hirensheth13@gmail.com 🌐 www.divyajyotpipestores.co.in



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> PVC FLEXIBLE HOSE HOSE



### Material:

- Wall: High Grade Soft PVC
- Spiral: Spring Steel Wire

### Standard Color:

- Grey and Transparent

### Temperature Range:

- -10 °C Approx. to +70 °C Approx.
- Short Time to +80 °C Approx.

### Properties

- Optimized Flow Properties
- Good Resistance To Alkalis & Acids
- Chemical Resistant
- Super-Light
- Flame-Retardant Acc To UL94-HB
- Kink-Proof
- Capable Of Electrostatic Discharge By Grounding The Spiral
- Excellent Compressibility 3:1

### Application:

- For Powdery Solids Such As Dust, Powder & Fibres
- For Gaseous Media Such As Vapors & Smoke
- For Air Conditioning & Ventilation Technology

ID	Over Pressure bar	Vacuum Pressure bar	Bending Radius mm	Stock Length mtr	Price per mtr
38	0.500	0.180	46	10	225/-
50	0.400	0.150	58	10	235/-
63	0.300	0.100	72	10	245/-
76	0.270	0.080	85	10	275/-
80	0.250	0.070	85	10	345/-
100	0.200	0.050	109	10	385/-
125	0.160	0.030	134	10	525/-
150	0.140	0.030	159	10	715/-
203	0.100	0.025	213	10	1200/-

★ DISCOUNT: \_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES

## SPARK HOSE® EVA HOSE



### CONSTRUCTION:

- Self Supporting Profile

### TEMP RANGE:

- - 45°C to + 65°C Approx

### FEATURES:

- Good Resistance to Alkalis & Acids.
- Good Resistance to UV & Ozone.
- Light Model
- Highly Flexible,
- Crush-Proof
- Floatable
- Gas & Liquid Tight

### APPLICATIONS:

- Industrial Vacuum Cleaner
- For Portable Sweeping Machine
- Ideal for Point Suction Hose & Protection (Corrugated on the convoluted)

### STANDARD COLOR:

- Black

SIZE (ID) (MM)	SIZE (OD) (MM)	BENDING RADIUS (BAR)	VACUUM PRESSURE	STANDARD LENGTH (MTR)	RATE PER MTR (INR)
25	32.20	66	0.50	20	185/-
32	40.40	82	0.50	20	210/-
38	47.20	93	0.50	20/30	285/-
50	60.40	121	0.50	20	550/-

★ DISCOUNT: \_\_\_\_\_% ★

## SPARK HOSE® SWIMMING POOL HOSE



SIZE (ID) (MM)	STD. LENGTH (MTRS.)	RATE WITH COUPLER (Rs./Mtr.)
32	15	185/-
38	15	210/-

### CONSTRUCTION:

- Open Profile Geometry ater Vacuum,

### APPLICATIONS:

- Suction hose for W
- Pool Hose for Cleaning Swimming Pool.

★ DISCOUNT: \_\_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**

**TUFHOSE**

**Realon**

**Agam**  
HOSES

**GOODLON**



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> POLYURETHANE COPPER COATED STEEL WIRE REINFORCED HOSE



SIZE ID (MM)	STANDARD LENGTH (MTR)	PRICE PER MTR
25	20	495/-
30	20	550/-
40	20	670/-
51	20	770/-
60	20	880/-
63	20	900/-
76	20	975/-
80	20	1000/-
90	20	1050/-
102	20	1075/-
110	15	1265/-
115/120	15	1320/-
127	15	1320/-
140	15	1430/-
152	15	1580/-
160	15	1760/-
165	15	1815/-
175	15	1955/-
180	15	1955/-
203	15	2130/-
220/225	15	2585/-
254	15	2820/-
305	15	3120/-
354	10	3920/-
405	10	5600/-

### APPLICATIONS:

- For Extraction Arms & Dust Collection Equipment
- For Computer Numerical Control(CNC) Machining Areas
- For Abrasive Solids Such as Dust, Powder, Fibers & Chip
- For Industrial Air Movement Fume Control

### PROPERTIES:

- Optimized Flow Properties
- Microbe & Hydrolysis Resistant
- Chemical Resistant
- Good Resistant to UV & Ozone
- Excellent Low Temperature Flexibility
- Small Bending Radius
- Kink-Proof
- Gas & Liquid Tight
- Good Resistant to Abrasion
- Excellent Compressibility 4:1
- Anti-Static by Grounding the Spiral

### TEMP RANGE:

- -40°C Approx to + 90°C Approx
- Short Time +125°C Approx

### STANDARD COLOR:

- Transparent

### CONSTRUCTION:

- Spring Steel Wire Integrated in Wall

### MATERIAL:

- Wall: Easter-Polyurethane
- Spiral: Spring Steel Wire

★ DISCOUNT: \_\_\_\_\_% ★





# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> SILICON DOUBLE LAYER HOSE WITH HOSE STEEL WIRE REINFORCED



SIZE I.D (MM)	STANDARD LENGTH (MTR)	RATE PER MTR (INR)
19	4	875/-
25	4	875/-
32	4	875/-
40	4	945/-
45	4	1000/-
51	4	1050/-
63	4	1100/-
76	4	1225/-
83	4	1250/-
90	4	1280/-
102	4	1552/-
110	4	1840/-
115	4	1840/-
127	4	1900/-
140	4	2100/-
152	4	2200/-
160	4	2520/-
180	4	2880/-
203	4	3080/-
225	4	3320/-
254	4	4350/-
305	4	5300/-
355	4	6100/-
400	4	6900/-

### CONSTRUCTION:

- Double layer Silicon Hose are made of silicon coated glass fiber fabric, with inner hidden steel spring spiral wire, out glass fibre cord.

### APPLICATION:

- Hot air suction & blower
- Ceramic Industries (Inlet/Outlet Hose)
- Plastic Raw material dryers
- Flexographic - Rotogravure & Offset printing Machine.
- Yarn Drying units
- Plastic Processing Industry,
- Packaging Industry
- Open end spinning mill exhaust
- Wood Industry
- Also for carrying dusty particle at high temperatures

### TEMP RANGE:

- 60°C to 300°C Approx

### COLOUR:

- Bricks

### AXIAL COMPRESSIBILITY

- 30%

★ DISCOUNT: \_\_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>

Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street), Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795 | Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

✉ pipestores@gmail.com / hirensheth13@gmail.com 🌐 www.divyajyotpipestores.co.in





# DIVYA JYOT PIPE STORES

## TPR HOSE THERMOPLASTIC RUBBER HOSE



ID (MM)	STANDARD LENGTH (MTR)	PRICE PER MTR
16	20	500/-
20	20	600/-
25	20	650/-
32	20	700/-
38	20	900/-
51	20	1100/-
60	20	1400/-
63	20	1500/-
76	20	1550/-
80	20	1650/-
90	20	1800/-
102	15	2000/-
127	15	2350/-
152	15	2750/-
203	15	3100/-

### MATERIAL & CONSTRUCTION

TPR Hose made form EPDM/PP with PP Coated Steel Spring Wire reinforced which is the substitute of Neoprene Hose. It is quiet competitive without compromising your requirement. It is light & highly Flexible Hose, Temperature stable with good resistance against ozone.It has also more strength and also capable of eletro static discharge.

### TEMPERATURE RANGE

-40°C to +135°C (Short term up to 150°C)

COLOUR

Black

### APPLICATIONS

Air intake for air compressor and automotive engines, engine silencer emission clearance in workshops, chemical and ventilation industry, laundry machine dryers. Ideal for cold and hot air supply in multilayer film plants, offset printing presses like Heidelberg, Komori, Fujifilm, ManRoland Kba, Bobst, MullerMartini etc.

★ DISCOUNT: \_\_\_\_\_% ★



Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street), Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795 | Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

✉ pipestores@gmail.com / hirensheth13@gmail.com 🌐 www.divyajyotpipestores.co.in



# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE POLYURETHANE (P.U.) TUBING



### TUBE:

- Polyurethane

### CONSTRUCTION:

- Wall Interior & Exterior Smooth

### TEMP RANGE:

- -20°C to + 80°C Approx

### APPLICATIONS:

- For Compresses Air
- For Gaseous & Liquid Media
- Dry Compresses Non Corrosive Liquid
- Dry Compresses Air / Oxygen / Vacuum / Gas

### FEATURES:

- Highly Flexible, Small Bending Radius
- High Tensile Strength & Tear Resistance
- Hydrolysis Resistant
- Very Good Low Temperature

I.D (MM)	O.D (MM)	STD Length	Blue	Transparent	Red	Yellow	Black
2.5	4	200	11	13	13	13	13
4	6	100	17	19	19	19	19
5	8	100	32	35	35	35	35
6	8	100	26	28	28	28	28
6.5	10	100	50	56	56	56	56
7	10	100	48	53	53	53	53
8	10	100	40	43	43	43	43
8	12	100	64	71	71	71	71
9	12	50	63	70	70	70	70
10	12	50	61	68	68	68	68
10	14	50	104	114	114	114	114
12	16	50	108	119	119	119	119

★ DISCOUNT: \_\_\_\_% ★



## SILICON NYLON BRAIDED (FOOD - GRADED) HOSE



### Construction:

Silicone Hose Reinforced With Polyester Braiding. It Has Excellent Flexibility For Pressurized Fluid Transfer Application In Pharmaceutical And Biotech Industries. We Are Catering These Products To All Pharma And Biotech Companies In India And Overseas . Our Hoses Are Platinum – Cured Product, Contains No Sulphur, No Peroxides Or Other Acid Producing Chemicals Thereby Eliminating The Possibility Of Staining, Corroding, Or Deteriorating Other Materials It Contacts.

- Temp Range : -80 C To 180 C

### Application :

- Pharmaceutical And Biotech Material Transfer
- Critical Liquid Transfer
- Load Cell And Cell Cultures
- Analytical Lab Food And Beverages
- Biotechnology

### Key Features :

- Excellent Flexibility
- Manufactured From Low Volatile Grade Silicone Resin
- Imparts No Taste And Odor
- Lot Traceable
- Colored Outer Layer Available
- Custom Color Coding Available
- Sterilizable By Autoclave, Ethylene Oxide Gas & Gamma Radiation

SIZE IN MM (ID X OD)	SIZE IN INCH (ID)	MAX WORKING PRESSURE IN (BAR) AT 27 C	MIN BURST PRESSURE IN (BAR) AT 27 C	MIN BEND RADIUS IN (MM)	RATE
6 X 12	1/4"	10.0	30	45	622/-
8 X 16	5/16"	9.0	27	45	745/-
10 X 18	3/8"	6.0	18	65	760/-
12 X 20	1/2"	7.0	21	75	985/-
16 X 24	5/8"	7.0	21	85	1300/-
19 X 27	3/4"	6.0	18	105	1565/-
25 X 35	1"	4.0	12	111	1995/-
32 X 42	1 1/4"	3.0	9	195	2775/-
37 X 47	1 1/2"	2.5	8	C/P	3720/-
50 X 60	2"	2.0	6	C/P	6315/-

★ DISCOUNT: \_\_\_% ★

**APEX**  
HOSE

**SPARK**  
HOSE

**ANCHOR**

**TUFHOSE**

**Agam**  
HOSES

**G**  
GOODLON

## SILICON FOOD - PHARMACEUTICAL TUBING



### CONSTRUCTION

Comprehensive range of silicone tubing, with bore sizes from 0.2mm up to 200mm, meets the demands of practically any application. The smallest tubing manufactured by us is most commonly used as electrical sleeving, whilst mid-range sizes are generally used to carry liquids and powders within the food processing and pharmaceutical industries.

We offers a wide selection of approved material for use specifically within hygiene critical applications including FDA, Bfr and USP Class VI. Dielectric tubing and hot air ducting are just two uses for the largest tubes in the range.  
 TEMP RANGE : UPTO +180°C

SIZE		STD LENGTH	RATE	SIZE		STD LENGTH	RATE
ID (MM)	OD (MM)	MTR	PER MTR	ID (MM)	OD (MM)	MTR	PER MTR
0.80	2.40	100	13/-	5.00	9.00	50	103/-
1.00	2.00	100	8/-	5.00	10.00	50	138/-
1.00	3.00	100	19/-	5.00	11.00	50	217/-
1.50	2.50	100	10/-	6.00	8.00	50	70/-
1.50	3.00	100	16/-	6.00	9.00	50	83/-
2.00	3.00	100	15/-	6.00	10.00	50	117/-
2.00	4.00	100	29/-	6.00	11.00	50	156/-
2.00	5.00	100	44/-	6.00	12.00	50	198/-
2.00	6.00	100	64/-	6.00	13.00	50	280/-
2.50	4.00	100	23/-	7.00	10.00	50	94/-
3.00	4.00	100	16/-	7.00	12.00	50	144/-
3.00	5.00	100	24/-	8.00	10.00	50	105/-
3.00	6.00	50	50/-	8.00	11.00	50	110/-
3.00	7.00	50	74/-	8.00	12.00	50	147/-
4.00	5.00	50	21/-	8.00	14.00	50	280/-
4.00	6.00	50	37/-	8.00	16.00	50	342/-
4.00	7.00	50	60/-	9.00	12.00	50	162/-
4.00	8.00	50	88/-	9.00	15.00	50	290/-
4.00	9.00	50	123/-	10.00	12.00	50	120/-
4.00	10.00	50	155/-	10.00	14.00	50	176/-
5.00	7.00	50	54/-	10.00	16.00	50	285/-
5.00	8.00	50	71/-	11.00	14.00	50	170/-

### APPLICATION

- Peroxide Cured Silicone Transparent Tubing's - For General applications
- Platinum Cured Translucent Silicone Tubing's - A very popular all-rounder, suitable for food contact, peristaltic pumps and hundreds of other applications.
- Sleeving - Typically thin walled, available in a variety of sizes and colours.
- Coloured Tubing - A comprehensive range of regular sizes and popular colours.


★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

## SILICON FOOD - PHARMACEUTICAL TUBING

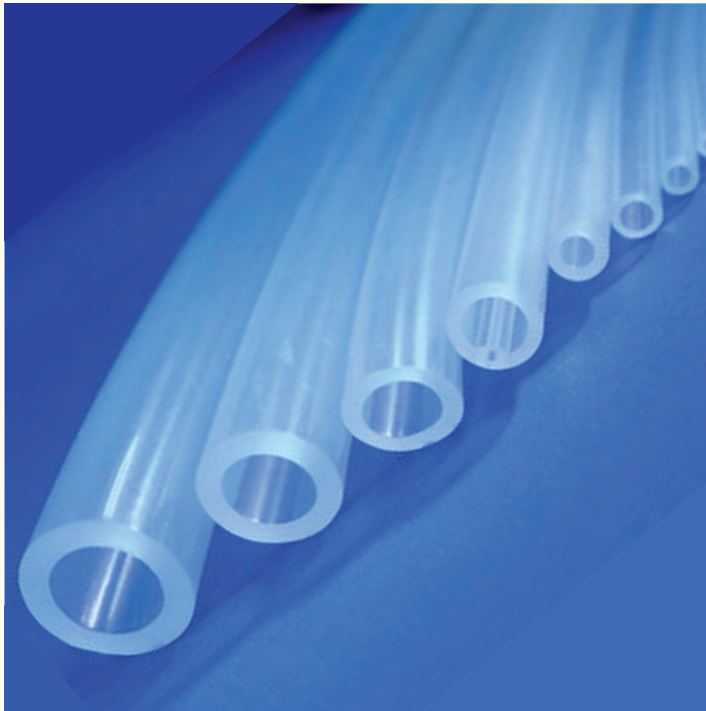

SIZE		STD LENGTH	RATE
ID (MM)	OD (MM)	MTR	PER MTR
11.00	16.00	50	260/-
12.00	16.00	50	205/-
12.00	18.00	30	330/-
12.00	19.00	30	425/-
12.00	24.00	30	890/-
13.00	19.00	30	425/-
15.00	21.00	30	470/-
16.00	24.00	30	640/-
19.00	24.00	30	480/-
20.00	25.00	30	590/-
24.00	30.00	30	710/-
25.00	31.00	30	735/-
25.00	32.00	30	870/-
25.00	35.00	30	1300/-
32.00	38.00	20	840/-
38.00	44.00	20	1335/-
50.00	56.00	10	3000/-
63.00	69.00	5	4170/-
72.00	82.00	5	5835/-
98.00	104.00	5	7500/-
114.00	120.00	5	9170/-
150.00	156.00	5	10840/-

### CONSTRUCTION

Comprehensive range of silicone tubing, with bore sizes from 0.2mm up to 200mm, meets the demands of practically any application. The smallest tubing manufactured by us is most commonly used as electrical sleeving, whilst mid-range sizes are generally used to carry liquids and powders within the food processing and pharmaceutical industries.

We offers a wide selection of approved material for use specifically within hygiene critical applications including FDA, Bfr and USP Class VI. Dielectric tubing and hot air ducting are just two uses for the largest tubes in the range.

TEMP RANGE : UPTO +180°C

### APPLICATION

- Peroxide Cured Silicone Transparent Tubing's – For General applications
- Platinum Cured Translucent Silicone Tubing's - A very popular all-rounder, suitable for food contact, peristaltic pumps and hundreds of other applications.
- Sleeving – Typically thin walled, available in a variety of sizes and colours.
- Coloured Tubing – A comprehensive range of regular sizes and popular colours.

★ DISCOUNT: \_\_\_\_% ★






# DIVYA JYOT PIPE STORES



## PVC GOLDEN TUBING

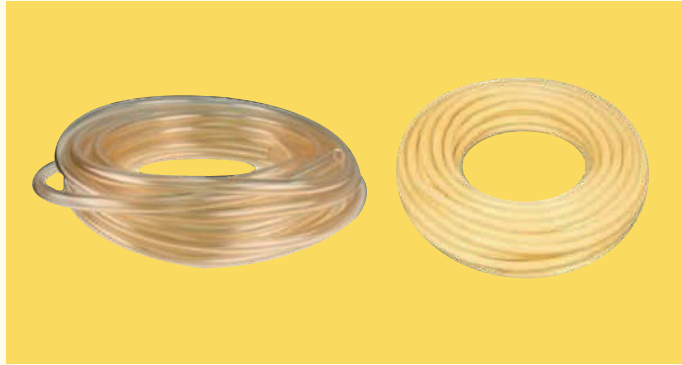

★ DISCOUNT: \_\_\_\_\_% ★

SIZE (INCH)	GOLDEN (TRANSPARENT) LIST PRICE PER 30 MTRS (INR)	OPAQUE (SOFT) LIST PRICE PER 30 MTRS (INR)
3/16 x 3/64	-	139/-
3/16 x 1/16	199/-	199/-
3/16 x 3/32	318/-	318/-
1/4 x 3/32	358/-	358/-
1/4 x 1/8	537/-	537/-
5/16 x 3/32	468/-	468/-
5/16 x 1/8	677/-	677/-
3/8 x 3/32	557/-	557/-
3/8 x 1/8	736/-	736/-
1/2 x 1/8	1194/-	-
3/4 x 1/8	1592/-	-



## TRANSPARENT TUBING



SIZE (INCH)	INNER DIAMETER (ID)											
	3/16	1/4	5/16	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	2	2 1/2
1/32	88/-	97/-	126/-	-	-	-	-	-	-	-	-	-
3/64	136/-	165/-	195/-	233/-	272/-	-	-	-	-	-	-	-
1/16	195/-	224/-	272/-	321/-	408/-	-	603/-	-	-	-	-	-
3/32	311/-	350/-	457/-	545/-	603/-	681/-	973/-	1167/-	-	-	-	-
1/8	-	525/-	661/-	720/-	836/-	1031/-	1167/-	1712/-	2042/-	2918/-	3696/-	-
3/16	-	-	-	-	-	-	1887/-	2723/-	3598/-	3987/-	5252/-	-
1/4	-	-	-	-	1653/-	-	3112/-	3793/-	4474/-	4960/-	7586/-	9336/-

★ DISCOUNT: \_\_\_\_\_% ★





# DIVYA JYOT PIPE STORES



## PNEUMATIC AIR WATER HOSE (YELLOW STRIP) WEATHER RESISTANT

SIZE (MM)	THICKNESS (MM)	SIZE (INCHES)	W.P. BAR	PRICE RS./MTR
5.0 MM	3.8 MM	7/32	28	46/-
6.0 MM	3.5 MM	¼	22	52/-
8.0 MM	3.8 MM	5/16	22	62/-
10.0 MM	3.8 MM	3/8	22	72/-
12.5 MM	4.0 MM	½	18	92/-
16.0 MM	4.0 MM	5.8	18	128/-
20.0 MM	4.8 MM	¾	18	154/-
25.0 MM	5.0 MM	1	18	200/-
31.0 MM	6.0 MM	1-1/4	14	300/-
38.0 MM	6.5 MM	1-1/2	14	390/-
50.0 MM	6.5 MM	2	14	510/-



## WELDING HOSE EXCEEDS IS447-1988 (RED & BLUE COLOUR)

Abrasion Resistant / Flame Retardant Welding Hose Chack Proof Nitrile Blended

SIZE (MM)	THICKNESS (MM)	SIZE (INCHES)	W.P. BAR	PRICE RS./MTR
6.5 MM	3.5 MM	¼	22	50/-
8.0 MM	3.8 MM	5/16	22	55/-
10.0 MM	3.8 MM	3/8	22	68/-



## WATER HOSE(I.S.) 446:1980 III 10KG/CM2 HEAVY DUTY (BLUES STRIP)

SIZE (MM)	THICKNESS (MM)	SIZE (INCHES)	W.P. BAR	PRICE RS./MTR
10.0 MM	3.0 MM	3/8	10	54/-
12.5 MM	3.3 MM	½	10	60/-
16.0 MM	3.5 MM	5/8	10	80/-
20.0 MM	3.8 MM	¾	10	116/-
25.0 MM	3.8 MM	1	10	146/-
31.0 MM	4.0 MM	1/1/4"	10	205/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE RUBBER HYDROLIC HOSE SAE 100 R-1 AT



**FEATURE**

**STANDARD COLOR** - INNER TUBE -BLACK / OUTER COVER – BLACK

**PROPERTIES** - Uniform Thickness , High Pessure, Flexible

**TUBE** - Black,oil-resistant synthetic rubber (NBR)

**COVER** – Wrap & Smooth - Black ,oil and abrasion resistant synthetic rubber

**REINFORCEMENT**- Single braided high tensil steel wire

**TEMP RANGE** -40°C TO + 100°C (+120°C intermittent)

**APPLICATION**  
For medium to high pressure Hydraulic Lines applied in various applications like earthmoving and other industries

SIZE	ID (MM)	OD (MM)	WORKING PRESSURE		BURSTING PRESSURE		BEND RADIUS (MM)	STANDARD LENGTH (MTR)	RATE PER MTR
			BAR	PSI	BAR	PSI			
1/4"	6.40	13.40	225	3260	900	13050	100	100	150/-
5/16"	8.10	15.00	215	3120	850	12325	115	100	160/-
3/8"	9.80	17.40	180	2610	720	10440	130	100	175/-
1/2"	12.80	20.60	160	2320	640	9280	180	100	200/-
5/8"	15.90	23.70	130	1885	520	7540	200	100	260/-
3/4"	19.00	27.70	105	1520	420	6090	240	100	300/-
1"	25.40	35.50	88	1275	350	5075	300	100	410/-
1.1/4"	31.80	43.50	63	915	250	3625	420	50	610/-
1.1/2"	38.10	50.60	50	725	200	2900	500	40	710/-
2"	50.80	64.00	40	580	160	2320	630	40	1080/-

★ DISCOUNT: \_\_\_\_% ★







# DIVYA JYOT PIPE STORES

## SPARK<sup>®</sup> HOSE RUBBER HYDROLIC HOSE SAE 100 R-2 AT



### CONSTRUCTION:

**APPLICATION:** For high pressure hydraulic lines applied in various applications like earthmoving and other industries.

**REINFORCEMENT:** Double Braided high tensile steel wire.

**TEMP RANGE:** -40°C TO +100°C (+120°C intermittent).

**STANDARD COLOUR:** Inner Tube - Black / Outer Tube - Black.

**PROPERTIES:** Uniform Thickness, High Pressure, Flexible.

**TUBE:** Black, Oil resistant synthetic rubber (NBR)

**COVER:** Wrap & Smooth - Black, oil and abrasion resistant synthetic rubber.

SIZE INCH	ID (MM)	OD (MM)	WORKING PRESSURE		BURSTING PRESSURE		BEND RADIUS MM	STANDARD LENGTH (MTR)	RATE PER MTR
			BAR	PSI	BAR	PSI			
1/4"	6.40	15.00	400	5800	1600	23200	100	100	180/-
5/16"	8.10	16.50	350	5075	1400	20300	115	100	200/-
3/8"	9.80	19.00	330	4785	1320	19140	130	100	220/-
1/2"	12.80	22.00	275	3990	1100	15950	180	100	270/-
5/8"	15.90	25.40	250	3625	1000	14500	200	100	330/-
3/4"	19.00	29.30	215	3120	850	12325	240	100	390/-
1"	25.40	38.00	165	2390	650	9425	300	100	580/-
1.1/4"	31.80	48.00	125	1815	500	7250	420	50	850/-
1.1/2"	38.10	54.60	90	1305	360	5220	500	40	1060/-
2"	50.80	67.40	80	1160	320	4640	630	40	1500/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES



## PVC FLEXIBLE DUCT PIPE (GREY / TRANSPARENT)



### CONSTRUCTION:

- Specially Compounded Rigid PVC Reinforcement

### FEATURES:

- Light weight & flexible
- Smooth Flow
- Resistance
- Economical to Install

### APPLICATIONS:

- Cold or Warm air installations of various kinds.
- Removing fumes from factories, fuel tanks & underground installations.
- Dust collection from various machines.
- Discharge of welding gas at the welding job site.
- Air cleaner hose for vehicles and heavy equipments.
- For dung cart.
- Conveying of granules or fine particles of raw material in processing industries
- In domestic vacuum cleaning equipments.
- In washing machines.
- For carding machines and draw forms in Textile Industry.
- Transportation of wheat and other cereals in the course of processing.

SIZE (MM)	SIZE (INCH)	STANDARD LENGTH (MTRS.)	DUCT GREY RATE PER MTR. (INR)	DUCT TRANSPARENT RATE PER MTR. (INR)
16	5/8	30	-	-
22	3/4	30	96/-	106/-
25	1	30	108/-	123/-
30	1-1/4	30	130/-	147/-
40	1-1/2	30	153/-	173/-
50	2	30	209/-	238/-
60	2-1/4	30	240/-	274/-
63	2-1/2	30	270/-	308/-
75	3	30	311/-	355/-
80	3-1/4	30	323/-	368/-
90	3-1/2	30	350/-	400/-
100	4	30	390/-	445/-
110	4-1/2	30	457/-	520/-
125	5	15	557/-	635/-
140	5-1/2	15	738/-	840/-
150	6	15	787/-	900/-
160	6-1/2	15	1024/-	1167/-
200	8	15	1185/-	1350/-
225	9	10	1418/-	-
250	10	10	1600/-	1825/-
300	12	10	2108/-	2400/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES



## AIR / PNEUMATIC / FOOD GRADE PIPE (TRANSPARENT)




**APPLICATIONS:** For Tyre Inflation, Used In Pneumatic Tools In Industries & For Heavy Duty Of Water & Chemicals

SIZE (MM)	WALL THICKNESS (MM)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (Mtrs.)	LIST PRICE (Rs./Mtrs.)
5	2.5	15	100	22/-
6	3.0	25	100	42/-
8	3.0	25	100	52/-
10	3.5	25	100	62/-
12	3.5	20	100	83/-
15	3.5	20	100	114/-
20	4.0	20	50 / 100	140/-
25	4.8	15	50 / 100	182/-
31	4.8	15	30 / 50	260/-
40	5.0	15	30 / 50	378/-
45	5.5	10	30 / 50	505/-
50	6.0	10	30 / 50	520/-
58	6.5	8	30	705/-
63	7.0	8	30	845/-
75	8.0	6	30	1170/-



## WELDING PIPE (RED & BLUE)

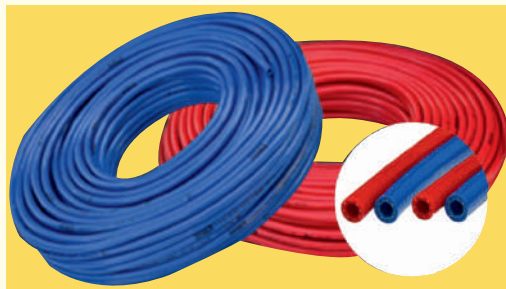

SIZE (MM)	WALL THICKNESS (MM)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (MTRS)	LIST PRICE (Rs./Mtrs.)
6	3.0	25	100	42/-
8	3.0	25	100	52/-
10	3.5	25	100	62/-

**APPLICATIONS:**

Red Welding Pipe - Used For Acetylene Application  
Blue Welding Pipe - Oxygen & Other Non Combustible Gases



## ROCK DRILL HOSE (YELLOW)



SIZE (MM)	WALL THICKNESS (MM)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (MTRS)	LIST PRICE (Rs./Mtrs.)
20	4	20	100	142/-

**APPLICATIONS:**

Realon Rock drill Hose is reinforced with high tenacity yarn to meet the pressure requirements for general construction work, road building, tunneling metallic and non-metallic ore mines, in structural shops with chipping, grinding and revetting application service stations for tyre inflation, for pneumatic tools use in industries and for heavy duty suction and delivery of water and chemicals.

★ DISCOUNT: \_\_\_\_% ★





# DIVYA JYOT PIPE STORES



## SUPER SPRAY PIPE (DOUBLE BRAIDED) (YELLOW)



SIZE (MM)	SIZE (INCH)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (MTRS.)	LIST PRICE (Rs./Mtrs.)
10	5	40	100	133/-
12	5.5	30	100	152/-

**APPLICATIONS:** For High Pressure Spraying Using Hands Or Pump Driven Of Water Based Chemicals, Insecticides, Fungicides, Weeding Etc



## POWER SPRAY PIPE (YELLOW)



SIZE (MM)	SIZE (INCH)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (MTRS.)	LIST PRICE (Rs./Mtrs.)
8	3.5	32	100	62/-

**APPLICATIONS:** High Pressure Industrial Applications, Pesticides Equipments In Agriculture, Compressed Air In Garages



## CONSTRUCTION HOSE (YELLOW)



SIZE (MM)	WALL THICKNESS (MM)	WORKING PRESSURE (kg/cm <sup>2</sup> )	COIL LENGTH (MTRS.)	LIST PRICE (Rs./Mtrs.)
20	2.5	7	100	65/-
25	3.0	5	100	106/-
31	3.6	5	100	178/-

**FEATURES:** Its Special Yellow With Inner Black Colour Combination Make It More Rough And Tough With Longer Service Life.

**APPLICATIONS:** Conveying Of Water Engineering, Construction & Development Sites

★ DISCOUNT: \_\_\_% ★

## OTHER PRODUCTS AVAILABLE ON REQUEST



NON TOXIC HOSE



HEAVY DUTY SUCTION HOSE



BLUE OIL HOSE



MEDIUM DUTY SUCTION HOSE

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

## APEX HOSE RUBBER CANVAS HOSE (HEAVY)



- TUBE:**
- Rubber Coating
- COVER:**
- Cotton & Polyester Jacket
- APPLICATIONS:**
- Fire Fighting Hose
  - Used in Water Discharge
  - Agriculture, Construction & Industrial uses.
- FEATURES:**
- Easily Foldable
  - Light Weight
- STANDARD LENGTH:**
- 30 Mtrs

SIZE (INCH)	SIZE (MM)	RATE PER MTR (INR)
1	25	84/-
1 1/2	38	90/-
2	50	95/-
2 1/2	65	120/-
3	75	145/-
4	100	170/-
5	125	250/-
6	150	340/-
8	200	410/-

★ DISCOUNT: \_\_\_\_% ★

## APEX HOSE CANVAS PU COATING HOSE



- TUBE:**
- PU Linning Coating
- COVER:**
- Cotton & Polyester Jacket
- APPLICATIONS:**
- Fire Fighting Hose
  - Used in Water Discharge
  - Cable & Sling Protection Cover.
- FEATURES:**
- Easily Foldable
  - Light Weight
- STANDARD LENGTH:**
- 30 Mtrs

SIZE (INCH)	SIZE (MM)	RATE PER MTR (INR)
1 1/2	38	72/-
2	50	80/-
2 1/2	65	85/-
3	75	102/-
4	100	130/-
5	125	202/-
6	150	225/-
8	200	320/-
10	250	650/-

★ DISCOUNT: \_\_\_\_% ★


## SPARK HOSE BLUE LAY FLAT HOSE



- TUBE:**
- PVC Hose
- COVER:**
- Cotton & Polyester Jacket
- APPLICATIONS:**
- Agricultural Fields
  - Construction Sites
- FEATURES:**
- Easily Foldable
  - Light Weight

SIZE (INCH)	SIZE (MM)	LENGTH (MTR)	RATE PER MTR (INR)
1 1/2	40	100	71/-
2	50	100	87/-
2 1/2	63	100	112/-
3	75	100	130/-
4	102	100	207/-
6	150	60	420/-
8	200	60	672/-
10	250	50	980/-
12	300	50	1293/-

★ DISCOUNT: \_\_\_\_% ★





# DIVYA JYOT PIPE STORES

## ANCHOR<sup>®</sup> MEDIUM DUTY SUCTION HOSE (GREEN)



**TUBE:**

- Strong, Flexible & Smooth Plasticized PVC.

**REINFORCEMENT:**

- Shock Resistant Hard Rigid PVC Spiral.

**TEMP RANGE:**

- -5 °C to + 70°C Approx

**APPLICATIONS:**

- Suction & Delivery Of Water For Irrigation Purpose Agricultural With Electro Mono Block & Oil Engines.
- Suction & Delivery of Saline Water, Light Acids, Alkalies & Other Chemicals Except Solvents.
- For Conveying of Granules or Fine Particles of Raw Materials in Processing Industries.

**FEATURES:**

- Long Retained Flexibility
- Bending Radius Very Good.
- No Kinking, Bulging Or Bursting Even In The Most Severe Working Conditions.

SIZE (MM)	SIZE (INCH)	I.D (MM)	O.D (MM)	THICKNESS (MM)	APP WT MTR (KG)	BENDING RADIUS (MM)	WORKING PRESSURE (BAR)	LENGTH PER ROLL (MTR)	RATE PER MTR (INR)
20	3/4"	19	23	2	0.23	45	7	30	55/-
25	1"	25	30	2.5	0.30	55	7	30	68/-
30	1 1/4"	31	36	2.5	0.40	75	6.5	30	92/-
40	1 1/2"	38	43	2.5	0.50	95	5	30	115/-
50	2"	50	57	3.5	0.73	120	4	30	170/-
65	2 1/2"	63	71	4	1.06	160	4	30	250/-
75	3"	75	84	4.5	1.40	270	3.5	30	330/-
90	3 1/2"	90	99	4.5	1.66	290	3.5	30	500/-
100	4"	101	112	5.5	2.50	310	3.5	30	550/-
110	4 1/2"	110	121	5.5	3.30	330	3.5	15	850/-
125	5"	126	139	6.5	3.66	340	3	15	925/-
150	6"	152	167	7.5	5.00	350	2.5	15	1300/-
200	8"	203	221	9	8.30	400	2.5	6	2550/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

## ANCHOR<sup>®</sup> HEAVY DUTY SUCTION HOSE (GREY)



### TUBE:

- Strong, Flexible & Smooth Plasticized PVC.

### REINFORCEMENT:

- Shock Resistant Hard Rigid PVC Spiral.

### TEMP RANGE:

- -10°C to + 70°C Approx

### APPLICATIONS:

- Coal, Mineral Mines, Stone & Lime Quarries.
- Shipping & Sewage Disposal De-Watering.
- Paper Mills, Cement Conveying Industries, Petrochemicals & Oil Exploration.
- Fire Fighting Equipments, Constructional Engineering.
- Metro Railway Projects.

### FEATURES:

- Excellent Resistance in high pressure.
- Minimum Friction Loss, Saves Energy & High Flow Rate.
- Smooth Inside Surface Results in Quick Conveyance of Fluids.
- Abrasion Resistant

SIZE (MM)	SIZE (INCH)	I.D (MM)	O.D (MM)	THICKNESS (MM)	APP WT MTR (KG)	BENDING RADIUS (MM)	WORKING PRESSURE (BAR)	LENGTH PER ROLL (MTR)	RATE PER MTR (INR)
20	3/4"	19	25	3	0.30	45	8	30	80/-
25	1"	25	32	3.5	0.40	60	7	30	100/-
30	1 1/4"	31	38	3.5	0.50	80	7	30	128/-
40	1 1/2"	38	45	3.5	0.60	110	4.5	30	170/-
50	2"	50	58	4	1.00	130	4.5	30	255/-
65	2 1/2"	63	73	5	1.35	175	4.5	30	335/-
75	3"	75	86	5.5	1.65	275	4.5	30	416/-
100	4"	101	116	7.5	3.00	240	4	30	740/-
125	5"	126	142	8	4.00	280	3	15	1070/-
150	6"	152	173	10.5	6.00	400	2.5	15	1550/-
200	8"	203	224	10.5	10.00	600	2.5	6	3048/-

★ DISCOUNT: \_\_\_\_\_% ★

**APEX**  
HOSE

**SPARK**<sup>®</sup>  
HOSE

**TUFHOSE**

**Realon**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**G**<sup>®</sup>  
GOODLON

Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street), Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795 | Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

pipestores@gmail.com / hiresheth13@gmail.com www.divyajyotpipestores.co.in



# DIVYA JYOT PIPE STORES

## P.V.C STEEL WIRE REINFORCED FLEXIBLE VINYL HOSE



### CONSTRUCTION:

- Steel wire Reinforced Vinyl Hoses

### FEATURES:

- Light In Weight
- Does Not Kink If Bent On Its Own Radius
- Water Proof And Non-Corroding
- Use Of High Tensile Spring Steel Wire
- PVC Coating Of Spring Steel Wire Eliminates Possibility Of Short Circuits And Prevents Rusting.

### APPLICATIONS:

- Electrical Conduiting • Machine Tool Wiring
- Switch Boards & Panel's
- Railway Coach Wiring
- Dust Exhaust For Wood Working
- Gas & Exhaust Fume Removal • Air Ducting
- Hoses For Hospital Equipments
- Dust Collection, Textile Machinery
- Vacuum Cleaners

SIZE (ID) (MM)	SIZE (OD) (MM)	ROLL STANDARD LENGTH (MTR)	RATE PER MTR (INR)
10	16	30	26/-
15	21	30	28/-
20	26	30	34/-
25	31	30	41/-
30	36	30	50/-
40	47	30	67/-
50	57	30	93/-
60	67	20	105/-
75	82	20	143/-
100	110	10 / 5	250/-
125	135	5	340/-
150	160	5	400/-
175	185	5	600/-
200	210	5	675/-
225	235	5	800/-
250	260	5	1000/-
275	285	5	1100/-
300	310	5	1300/-

★ DISCOUNT: \_\_\_\_\_% ★





## TUFHOSE INDUSTRIAL HOSE (WHITE BRAIDED)



SIZE (MM)	SIZE (INCH)	ECO LIST PRICE (Rs./Mtrs)	REGULAR LIST PRICE (Rs./Mtrs.)	SUPREME LIST PRICE (Rs./Mtrs.)
6	1/4	24/-	26/-	32/-
8	5/16	29/-	31/-	39/-
10	3/8	33/-	38/-	47/-
12	1/2	39/-	44/-	56/-
16	5/8	48/-	56/-	71/-
20	3/4	68/-	88/-	112/-
25	1	87/-	110/-	136/-
31	1 1/4	140/-	165/-	190/-
38	1 1/2	162/-	198/-	220/-
50	2	227/-	300/-	350/-

COIL LENGTH ROLL: 30 / 50 / 100

★ DISCOUNT: \_\_\_% ★

## TUFHOSE GARDEN HOSE (GREEN) (K.GREEN / D..GREEN / ORANGE)



SIZE (MM)	SIZE (INCH)	ECO LIST PRICE (Rs./Mtrs.)	REGULAR LIST PRICE (Rs./Mtrs.)
12 (G)	1/2	25/-	26.50/-
16 (G)	5/8	32.50/-	35/-
20 (G)	3/4	40/-	46/-
25 (G)	1	57.50/-	66/-

★ DISCOUNT: \_\_\_% ★

COIL LENGTH ROLL: 30 / 50 / 100

## TUFHOSE GAS WELDING HOSE (RED / BLUE)



SIZE (MM)	SIZE (INCH)	WORKING PRESSURE (kg/cm²)	BURSTING PRESSURE (kg/cm²)	LIST PRICE (Rs./Mtrs.)
8	5/16	22	60	32/-
10	3/8	22	60	38/-

★ DISCOUNT: \_\_\_% ★

**APPLICATION:** Suitable for Oxy-Acetylene, Welding & Cutting Equipments in all types of Industrial Works

★ DISCOUNT: \_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**SPARK**<sup>®</sup>  
HOSE

**Realton**<sup>®</sup>

**Agam**<sup>®</sup>  
HOSES

**GOODLON**<sup>®</sup>

## TUFHOSE FIRE HOSE



SIZE (MM)	SIZE (INCH)	ECO (TYPE 1) LIST PRICE (Rs./Mtrs.)	REGULAR (TYPE 2) LIST PRICE (Rs./Mtrs.)
12	1/2	-	50/-
20	3/4	73/-	90/-

★ DISCOUNT: \_\_\_\_% ★

**COLOUR:** Black to Black / Black to Red  
**COIL LENGTH:** 30/50/100

## TUFHOSE SUPER SPRAY HOSE (CAR WASHING)




SIZE (MM)	SIZE (INCH)	WORKING PRESSURE (kg/cm <sup>2</sup> )	BURSTING PRESSURE (kg/cm <sup>2</sup> )	LIST PRICE (Rs./Mtrs.)
10	3/8	40	120	92/-
12	1/2	30	90	101/-

★ DISCOUNT: \_\_\_\_% ★

**CONSTRUCTION:** Double Braided Car Washing  
**APPLICATIONS:** For Washing Vehicles at Service with High Pressure  
**COLOUR:** ORANGE  
**COIL LENGTH:** 100

## TUFHOSE POWER SPRAY HOSE

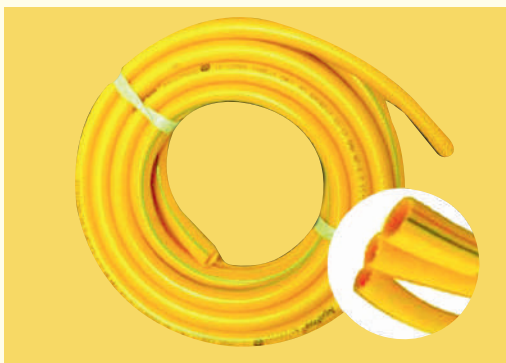

SIZE (MM)	SIZE (INCH)	WORKING PRESSURE (kg/cm <sup>2</sup> )	BURSTING PRESSURE (kg/cm <sup>2</sup> )	LIST PRICE (Rs./Mtrs.)
8	5/16	40	120	36/-
8.5	5/16	50	150	54/-
10	3/8	40	120	59/-
12.5	1/2	35	100	89/-

★ DISCOUNT: \_\_\_\_% ★

**CONSTRUCTION:** Single Braided & Double Braided  
**COLOUR:** Yellow with Red & Blue Line  
**COIL LENGTH:** 100

★ DISCOUNT: \_\_\_\_% ★

**APEX**  
HOSE

**ANCHOR**<sup>®</sup>

**SPARK**<sup>®</sup>  
HOSE

**Realton**

**Agam**<sup>®</sup>  
HOSES


**GOODLON**<sup>®</sup>



# DIVYA JYOT PIPE STORES



## PVC SPIDER GARDEN HOSE

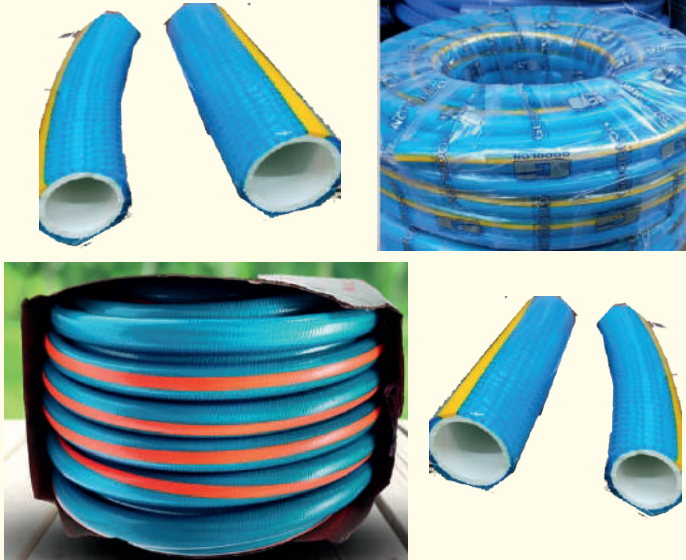

### TEMP RANGE:

- -10°C to 70°C Approx

### FEATURES

- Weather Resistant
- Crack Proof
- Superior Low Temperature Flexibility
- The Hose Does Not Kink Due To Its Patented Spider Braiding
- Free Of Toxins

### APPLICATIONS:

- Construction
- Curing
- Gardening
- Industry
- Agriculture
- House Hold
- All Water Application

### STANDARD PACKING:

- 30 , 50 & 100 METERS



## SPIDER WEATHER PROOF HOSE (TYPE-I)

SIZE (MM)	SIZE (INCH)	THICKNESS (MM)	W.P. KG/CM2	RATE PER PIECE (INR)
12.5	1/2	2.25	6	48/-
16	5/8	2.5	6	66/-
20	3/4	2.5	6	75/-
25	1	3.0	6	110/-
31	1-1/4	3.5	6	170/-
38	1-1/2	4.0	6	240/-



## SPIDER WEATHER PROOF HOSE (TYPE -II)

12.5	1/2	3.0	10	66/-
20	3/4	3.5	10	100/-
25	1	4.0	10	132/-

★ DISCOUNT: \_\_\_% ★





# DIVYA JYOT PIPE STORES

## JOLLY™ MS/SS WORM DRIVE HOSE CLAMPS



SIZE AS PER IS 4762 / BS 5315	JOLLY SIZE	DIAMETER (MM)		CARBON STEEL (MS) PRICE PER CLIP (INR)	SS-04 PRICE PER CLIP (INR)	QUANTITY IN ONE BOX (NOS.)
		MIN.	MAX.			
12	000	9	12	9.50/-	27/-	100
16	00M	11	16	9.50/-	27/-	100
20	00	13	20	9.50/-	27/-	100
22	0	16	22	11.50/-	29/-	100
25	100S	18	25	11.50/-	29/-	100
28	0X	20	28	11.50/-	30/-	100
30	1A	22	30	12.50/-	30/-	100
35	137S	25	35	12.50/-	32/-	100
38	1	30	38	14/-	32/-	100
40	1X	30	40	14/-	32/-	100
45	45A	35	45	14/-	34/-	50
50	2A	38	50	15/-	35/-	50
55	2	42	55	18/-	36/-	50
60	2X	45	60	18/-	37/-	50
70	3	50	70	21/-	40/-	50
75	75A	55	75	21/-	40/-	50
80	3X	60	80	21/-	42/-	50
90	4	70	90	23.50/-	46/-	50
100	4X	80	100	23.50/-	48/-	50
110	110A	90	110	32/-	54/-	50
115	5	95	115	32/-	55/-	50
120	5X	100	120	32/-	56/-	50
130	6	110	130	35/-	61/-	50
145	575S	125	145	35/-	61/-	50
160	6X	140	160	35/-	65/-	50
-	7"	160	178	48/-	69/-	50
-	8"	183	203	54/-	75/-	50
-	9"	209	229	54/-	80/-	50
-	10"	234	254	60/-	89/-	50
-	11"	260	280	60/-	94/-	50
-	12"	285	305	65/-	100/-	50
-	13"	310	330	74/-	105/-	50
-	14"	336	356	77/-	110/-	50
-	15"	361	381	91/-	115/-	50
-	16"	386	406	95/-	125/-	50
-	18"	437	457	110/-	145/-	50

★ DISCOUNT: \_\_\_% ★



Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street), Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795 | Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

✉ pipestores@gmail.com / hiresheth13@gmail.com 🌐 www.divyajyotpipestores.co.in

## PTFE TUBING



SIZE		WALL TH	STANDARD LENGTH (MTR)	RATE PER MTR
ID (MM)	OD (MM)			
3.20	1.60	0.80	100	165/-
3.00	1.00	1.00	100	165/-
4.00	2.00	1.00	100	240/-
4.80	3.20	0.80	100	180/-
6.35	3.20	1.50	100	315/-
6.00	4.00	1.00	100	285/-
6.40	4.80	0.80	100	210/-
8.00	4.80	1.50	100	425/-
8.00	6.00	1.00	100	315/-
9.50	6.35	1.50	100	515/-
8.00	6.40	0.80	100	240/-
9.50	7.90	0.80	100	285/-
10.00	8.00	1.00	100	405/-
11.10	8.00	1.50	30	610/-
11.10	9.50	0.80	30	330/-
12.00	10.00	1.00	30	450/-
12.50	11.10	0.80	30	690/-
12.70	11.10	0.80	30	390/-
14.30	12.70	0.80	30	450/-
14.00	12.00	1.00	30	540/-
16.00	12.50	1.50	30	1035/-
19.00	16.00	1.50	30	1095/-
22.20	19.00	1.50	30	1350/-
25.00	22.00	1.50	30	1575/-
28.00	25.05	1.50	30	1950/-

### PROPERTIES

- One of the most thermally stable plastic materials, functions up to 260° C.
- Resistance to virtually all corrosive material
- Very low co-efficient of friction
- Non-stick, Non-flammable, Non-toxic
- Excellent dielectric properties
- Excellent tensile strength even at low temperatures
- Moisture and U. V. resistance
- Virgin PTFE is approved by the Food and Drug Administration for use in food, beverage, cosmetics and pharmaceutical industries
- PTFE has relatively poor resistance to gamma radiation

### APPLICATIONS

Main industrial application fields of PTFE are where corrosion, wear, friction, exposure to temperature extremes and sealing are critical factors in product performance

★ DISCOUNT: \_\_\_% ★



## POLYAMIDE NYLON TUBING



**Material** - Nylon 12-6 grade / Milky White & Black Color

**Temperature** : -40°C to 80°C

### Applications

- Pneumatic Lines & Systems
- Air & Gas Lines For Compressors
- Fuel Lines in Automobiles & Transport Industries
- Fuel & Lube oil lines in Diesel & Petrol Engines
- Gas lines for Various industries
- Oil & Air lines in Textile Machineries
- High-Pressure Oil Lubricating Lines for Engineering, Textile & Automobile Industries
- Fluids and Gas Spray Lines in Agricultural equipment for insecticides & fertilizers
- For Linking power unit to trailer
- Spray pipes for paint spray gun units
- Duct Lines for Air-conditioning and ventilation systems
- For centralizes lubricating systems
- Conveying lines for elementary liquids such as milk, beer etc in food industries
- Compressed air lines for automatic pneumatic control by instrumentation
- As a sleeve cover to shield electrical cables from oil, moisture, corrosive atmosphere & abrasion

SIZE		W.P. KG/CM2	STANDARD LENGTH (MTR)	RATE PER MTR
ID (MM)	OD (MM)			
1.5	3	28	100	29/-
2	4	32	30	29/-
2.5	4	25	100	29/-
3	4	20	100	29/-
2.7	4.7	22	100	32/-
3	5	20	100	35/-
3	6	35	30	57/-
4	6	30	30	37/-
4.35	6.35	20	30	41/-
5	8	30	30	83/-
6	8	25	30	54/-
7.5	9.5	15	30	72/-
6.5	9.5	17	30	102/-
7	10	25	30	108/-
8	10	19	30	75/-
8	12	25	30	151/-
9	12	22	30	135/-
9.5	12.7	16	30	135/-
10	12	20	30	93/-
12	14	15	30	110/-
12	16	24	30	240/-

★ DISCOUNT: \_\_\_% ★

# OTHER INDUSTRIAL PRODUCTS





# DIVYAJYOT PIPE STORES



WE ARE REGISTER WITH



सत्यमेव जयते



**GeM**  
Government  
e Marketplace



Ministry of Micro, Small and Medium Enterprises,  
Government of India



MICRO, SMALL & MEDIUM ENTERPRISES  
सूक्ष्म, लघु एवं मध्यम उद्यम

UDYAM-MH-19-0116328

Shop no. 17, Bibijan Street, Ground Floor (Nagdevi Street),  
Mumbai - 400 003, Maharashtra, India

Shop no. : +91-98333 65520 / +91-95941 80795

Office no. : +91-98330 66655 / +91-98200 48626 / +91 22-40163395

pipestores@gmail.com / hirensheth13@gmail.com

[www.divyajyotpipestores.co.in](http://www.divyajyotpipestores.co.in)